




KR496 Friction Feeder

Advanced Machine Technology • U6, 6-8 Mitchell Road • Moorebank, NSW 2170
Phone: (02) 9821 1450

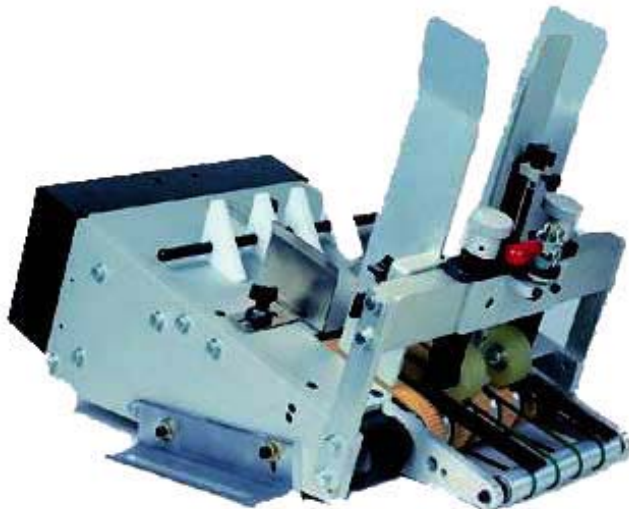

FEATURES

- *Easily feeds difficult items such as Z-Folds and Open-ends.
- *Portable design. Easily mounts onto KR215IJ Feed Base and KR219IJF Base.
- *Can be equipped for batch counting and mark reading modes.
- *Rugged construction.

OPTIONS

- *Stepper Motor Package for integrating with labeling base.
- * Bridge Width Extensions 14,16,18,24 inch.

SPECIFICATIONS

| | | | |
|--------------------|---------|---------|--------|
| Dimensions: | Length: | 23 IN | 584 MM |
| | Width: | 12.8 IN | 325 MM |
| | Height: | 17.5 IN | 445 MM |

Power Requirements: Electrical 120 VAC, 2.0 AMPS, 50/60 HZ

Belt Speed: Variable to 800 FT/MIN

| | | | | |
|--------------------------|------------|---------|----------|---------|
| Product Capacity: | Width: | Minimum | 3 IN. | 76 MM |
| | | Maximum | 11 IN. | 282 MM |
| | Length | Minimum | 4 IN. | 101 MM |
| | | Maximum | 12 IN. | 305 MM |
| | Thickness: | Minimum | 0.004 IN | 0.10 MM |
| | | Maximum | 0.188 IN | 4.78 MM |