


KR 630 STACKER



The KR 630 automatically sorts and stacks books, envelopes and magazines.

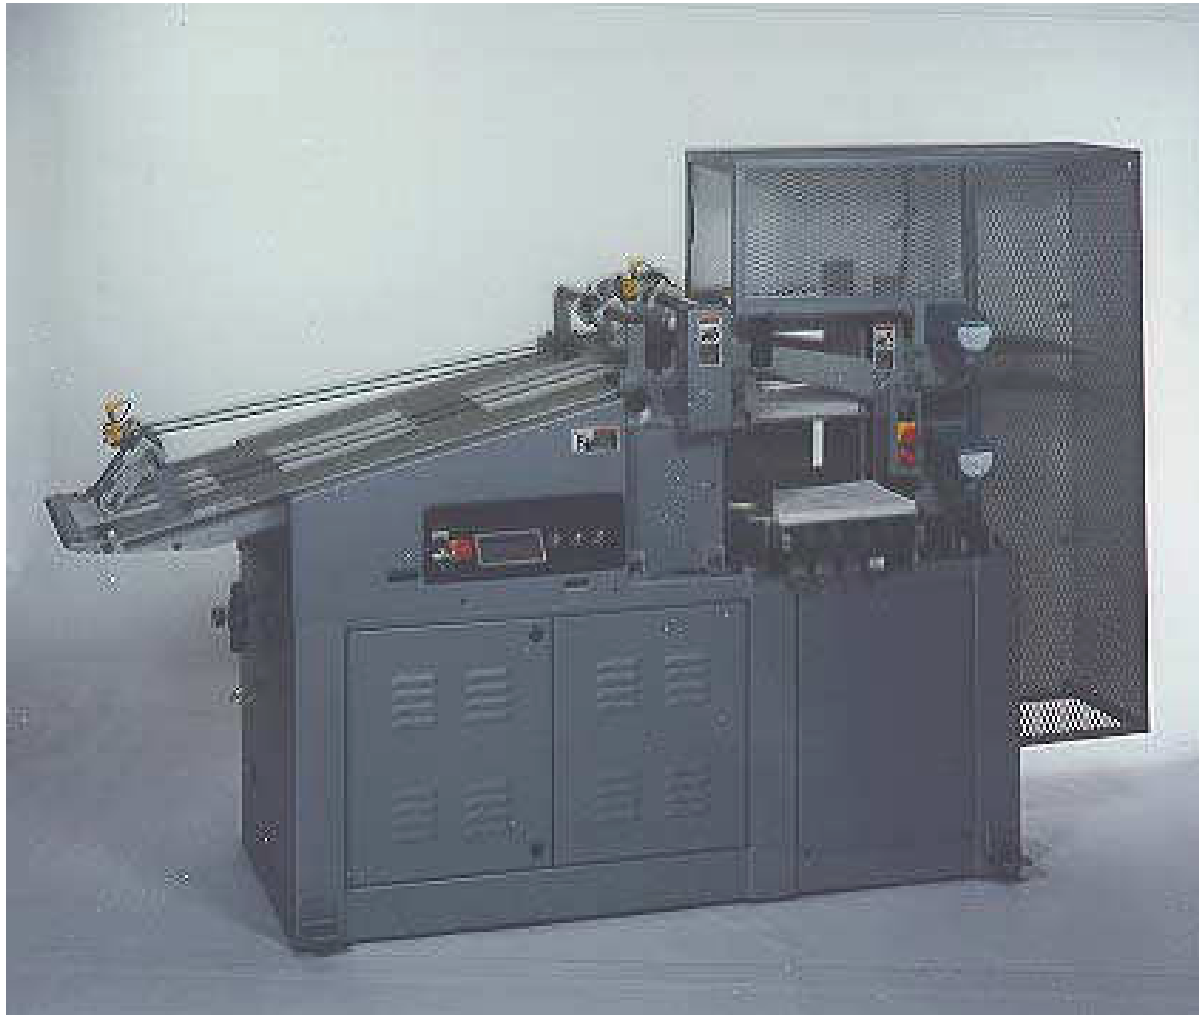

Sorting mail electronically is more accurate than manual sorting and allows for higher processing speeds. **Increase your operation's productivity** using the KR 630 to automatically sort mail in-line with your addressing system. Stacks are output according to preset counts and zip code breaks established in the mailing list. An in-line divert gate ensures accuracy by removing purged and non-printed mail pieces. **Compact, economical and easy to use** – *stack the odds of success in your favor* with the KR 630 stacker.



KR 630 Stacker *Zip Code Sorting System*

General Specifications

Physical

Length	8'
Height	5'
Width	56"
Infeed height	34" adjustable
Stack height	6" max
Exit conveyor height	32.5"
Conveyor exit direction	left or right

Electrical Requirements

Voltage	120 VAC
Current	20 amps
Phase	single
Hertz	60

Compressed Air Requirements

Minimum pressure	60 psi
Usage	1/2 CFM

Production Rate

Belt speed	400 ft/min
Stacks/minute	50/min

Material Handling

Min stock size	3" x 5"
Max stock size	12" x 15"
Minimum stock thickness	single sheet
Maximum stock thickness	.625"


Options

Hydraulic lift kit
Reduced/extended outfeed conveyor
Left or right outfeed conveyor
Stack mark reader

Your authorized Kirk-Rudy distributor



A straightforward operator interface simplifies operator training and setup

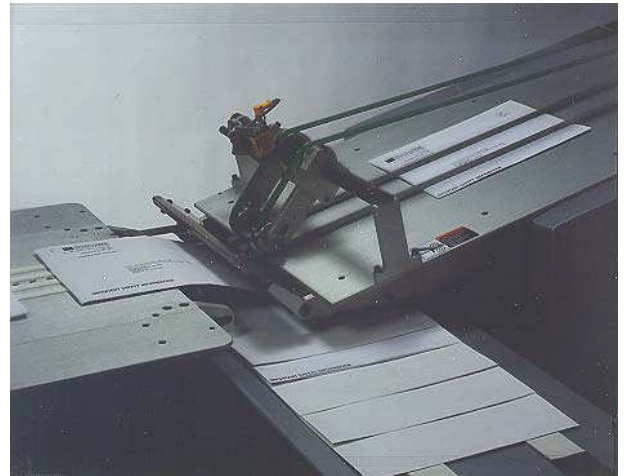

An in-line divert gate removes mixed mail, purged or non-printed mail pieces from the system



Minimal set-up time is needed because the KR 630 rolls into position over-top the shingle conveyor.

Specifications subject to change without notification
Guards have been removed for clarity. Do not operate machine without guards in place.